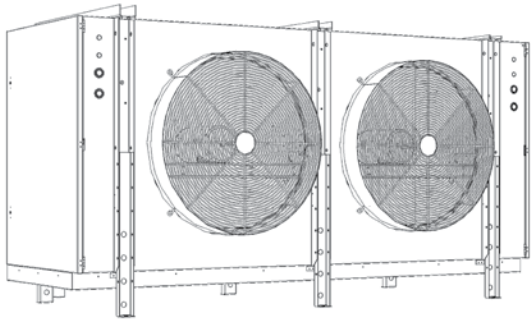




KHP High Profile Evaporator

**60
Hz**



DEFROST KIT & FUSE PACKAGE SELECTION GUIDE

Bulletin K30-KHP-DFK

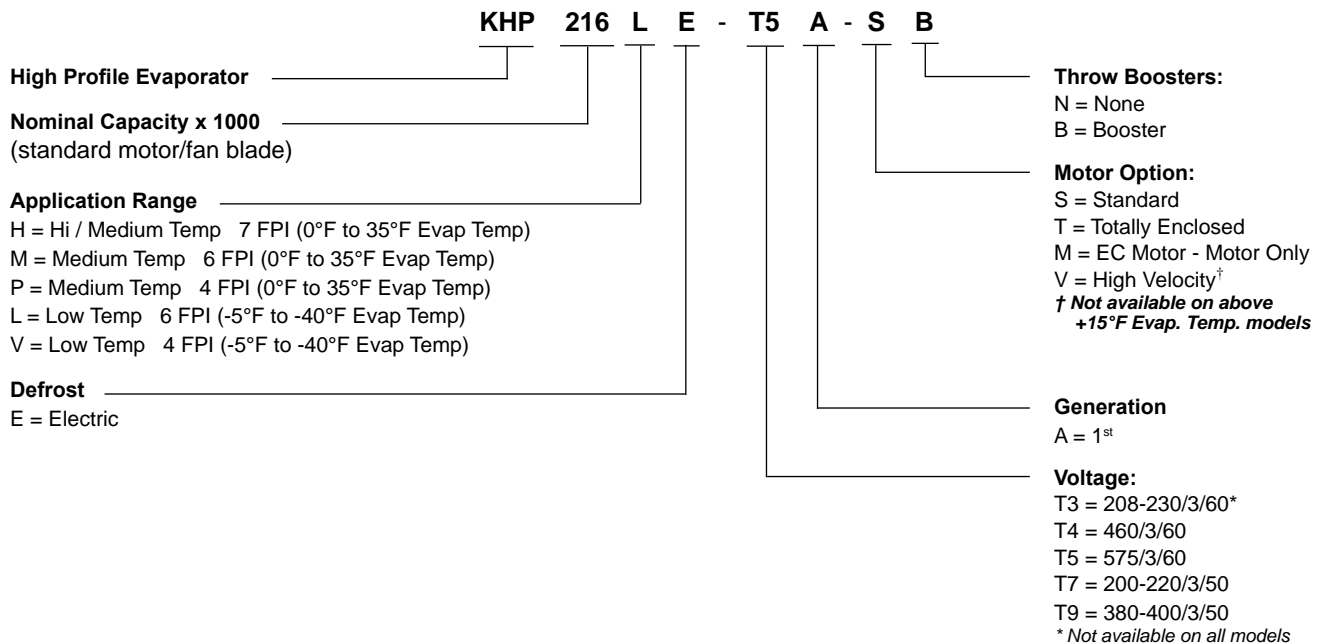

PRODUCT SUPPORT
 web: www.k-rp.com/khp
 email: evaps@k-rp.com
 call: 1-844-893-3222 x520



**For info on matched
KeepRite condensing units,
visit
www.k-rp.com/cu**

**Defrost Kit &
Fuse Package
Online Selection Tool:
www.k-rp.com/dfk**

NOMENCLATURE



Medium Temperature, 6 FPI, with standard ODP Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|----------|-------------|-------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| ME - MEDIUM TEMPERATURE | 6 | 2 | 068ME-T3A-S | 208-230/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 068ME-T4A-S | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 068ME-T5A-S | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 081ME-T3A-S | 208-230/3/60 | DFK-26 | FP-054 | DFK-35 | FP-085 |
| | | | 081ME-T4A-S | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 081ME-T5A-S | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 092ME-T3A-S | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 |
| | | | 092ME-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 092ME-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 108ME-T3A-S | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | 108ME-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 108ME-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | | 3 | 123ME-T3A-S | 208-230/3/60 | DFK-26 | FP-045 | DFK-37 | FP-038 |
| | | | 123ME-T4A-S | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 123ME-T5A-S | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 135ME-T3A-S | 208-230/3/60 | DFK-31 | FP-044 | DFK-38 | FP-037 |
| | | | 135ME-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 135ME-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 162ME-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 162ME-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 162ME-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 181ME-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | 181ME-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 181ME-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | | 4 | 221ME-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 221ME-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 221ME-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 243ME-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 243ME-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 243ME-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| 271ME-T4A-S | 460/3/60 | | DFK-26 | FP-046 | DFK-35 | FP-039 | | |
| 271ME-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | | |

Medium Temperature, 4 FPI, with standard ODP Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|--------------|-------------|-------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| PE - MEDIUM TEMPERATURE | 4 | 2 | 059PE-T3A-S | 208-230/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 059PE-T4A-S | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 059PE-T5A-S | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 072PE-T3A-S | 208-230/3/60 | DFK-26 | FP-054 | DFK-35 | FP-085 |
| | | | 072PE-T4A-S | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 072PE-T5A-S | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 083PE-T3A-S | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 |
| | | | 083PE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 083PE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 091PE-T3A-S | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 |
| | | 091PE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 091PE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | | 3 | 109PE-T3A-S | 208-230/3/60 | DFK-26 | FP-045 | DFK-37 | FP-038 |
| | | | 109PE-T4A-S | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 109PE-T5A-S | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 122PE-T3A-S | 208-230/3/60 | DFK-31 | FP-044 | DFK-38 | FP-037 |
| | | | 122PE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 122PE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 137PE-T3A-S | 208-230/3/60 | DFK-31 | FP-044 | DFK-38 | FP-037 |
| | | | 137PE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 137PE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 150PE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | 150PE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 150PE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | | 4 | 164PE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 164PE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 164PE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 200PE-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 200PE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 200PE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| 222PE-T3A-S | 208-230/3/60 | | DFK-39 | FP-086 | SPECIAL | SPECIAL | | |
| 222PE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | | |
| 222PE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | | |
| 256PE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | | |
| 256PE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | | |

Low Temperature, 6 FPI, with standard ODP Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|----------------------|-----|-----------|-------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| LE - LOW TEMPERATURE | 6 | 2 | 065LE-T3A-S | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 065LE-T4A-S | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 065LE-T5A-S | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 078LE-T3A-S | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 078LE-T4A-S | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 078LE-T5A-S | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 089LE-T3A-S | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 089LE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 089LE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 094LE-T3A-S | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 094LE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 094LE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | 3 | 118LE-T3A-S | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 118LE-T4A-S | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 118LE-T5A-S | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 134LE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 134LE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 134LE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 143LE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 143LE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 143LE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 161LE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 161LE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 161LE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 4 | 175LE-T3A-S | 208-230/3/60 | DFK-39 | FP-077 | SPECIAL | SPECIAL |
| | | | 175LE-T4A-S | 460/3/60 | DFK-26 | FP-081 | DFK-35 | FP-028 |
| | | | 175LE-T5A-S | 575/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 198LE-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 198LE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 198LE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 216LE-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 216LE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 216LE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 228LE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 228LE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |

Very Low Temperature, 4 FPI, with standard ODP Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|---------------------------|-----|-------------|-------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| VE - VERY LOW TEMPERATURE | 4 | 2 | 055VE-T3A-S | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 055VE-T4A-S | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 055VE-T5A-S | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 066VE-T3A-S | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 066VE-T4A-S | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 066VE-T5A-S | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 076VE-T3A-S | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 076VE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 076VE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 087VE-T3A-S | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 087VE-T4A-S | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 087VE-T5A-S | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | 3 | 100VE-T3A-S | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 100VE-T4A-S | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 100VE-T5A-S | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 114VE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 114VE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 114VE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 127VE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 127VE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 127VE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 145VE-T3A-S | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 145VE-T4A-S | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 145VE-T5A-S | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 4 | 172VE-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 172VE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 172VE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 187VE-T3A-S | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 187VE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 187VE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | 217VE-T4A-S | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |
| | | 217VE-T5A-S | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | |

**KHP HIGH PROFILE EVAPORATORS
with optional TEFC Motors**

Medium Temperature, 6 FPI, with optional TEFC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|-----|--------------|--------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| ME - MEDIUM TEMPERATURE | 6 | 2 | 068ME-T3A-T | 208-230/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 068ME-T4A-T | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 068ME-T5A-T | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 081ME-T3A-T | 208-230/3/60 | DFK-26 | FP-054 | DFK-35 | FP-085 |
| | | | 081ME-T4A-T | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 081ME-T5A-T | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | 092ME-T3A-T | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 | |
| | | 092ME-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 092ME-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | | 108ME-T3A-T | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |
| | | 108ME-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 108ME-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | 6 | 3 | 123ME-T3A-T | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 123ME-T4A-T | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 123ME-T5A-T | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 135ME-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 135ME-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 135ME-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 162ME-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 | |
| | | 162ME-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 162ME-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | | 181ME-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 | |
| | | 181ME-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 181ME-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | 6 | 4 | 221ME-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 221ME-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 221ME-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| 243ME-T3A-T | | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL | | |
| 243ME-T4A-T | | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | |
| 243ME-T5A-T | | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | |
| 271ME-T4A-T | | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | |
| 271ME-T5A-T | | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | |

Medium Temperature, 4 FPI, with optional TEFC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|----------|-------------|--------------|--------------|----------------|--------------|----------------|--------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| PE - MEDIUM TEMPERATURE | 4 | 2 | 059PE-T3A-T | 208-230/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 059PE-T4A-T | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 059PE-T5A-T | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 072PE-T3A-T | 208-230/3/60 | DFK-26 | FP-054 | DFK-35 | FP-085 |
| | | | 072PE-T4A-T | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 072PE-T5A-T | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | 083PE-T3A-T | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 | |
| | | 083PE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 083PE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | | 091PE-T3A-T | 208-230/3/60 | DFK-26 | FP-047 | DFK-35 | FP-040 | |
| | | 091PE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 | |
| | | 091PE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 | |
| | 4 | 3 | 109PE-T3A-T | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 109PE-T4A-T | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 109PE-T5A-T | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 122PE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 122PE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 122PE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 137PE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 | |
| | | 137PE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 137PE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | | 150PE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 | |
| | | 150PE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 | |
| | | 150PE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 | |
| | 4 | 4 | 164PE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 164PE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 164PE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 200PE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL | |
| | | 200PE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |
| | | 200PE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | |
| | | 222PE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL | |
| | | 222PE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |
| | | 222PE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | |
| 256PE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | | |
| 256PE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | | | |

Low Temperature, 6 FPI, with optional TEFC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|----------------------|-----|-------------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| LE - LOW TEMPERATURE | 6 | 2 | 065LE-T3A-T | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 065LE-T4A-T | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 065LE-T5A-T | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 078LE-T3A-T | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 078LE-T4A-T | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 078LE-T5A-T | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 089LE-T3A-T | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 089LE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 089LE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 094LE-T3A-T | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 094LE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 094LE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | 3 | 118LE-T3A-T | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 118LE-T4A-T | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 118LE-T5A-T | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 134LE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 134LE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 134LE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 143LE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 143LE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 143LE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 161LE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 161LE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 161LE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 4 | 175LE-T3A-T | 208-230/3/60 | DFK-39 | FP-077 | SPECIAL | SPECIAL |
| | | | 175LE-T4A-T | 460/3/60 | DFK-26 | FP-081 | DFK-35 | FP-028 |
| | | | 175LE-T5A-T | 575/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 198LE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 198LE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 198LE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 216LE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 216LE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | 216LE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | |
| | | 228LE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |
| | | 228LE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 | |

Very Low Temperature, 4 FPI, with optional TEFC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|---------------------------|-----|-----------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| VE - VERY LOW TEMPERATURE | 4 | 2 | 055VE-T3A-T | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 055VE-T4A-T | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 055VE-T5A-T | 575/3/60 | DFK-11 | FP-095 | DFK-13 | FP-094 |
| | | | 066VE-T3A-T | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 066VE-T4A-T | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 066VE-T5A-T | 575/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 076VE-T3A-T | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 076VE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 076VE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | | 087VE-T3A-T | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 087VE-T4A-T | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 087VE-T5A-T | 575/3/60 | DFK-17 | FP-078 | DFK-24 | FP-031 |
| | | 3 | 100VE-T3A-T | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 100VE-T4A-T | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 100VE-T5A-T | 575/3/60 | DFK-17 | FP-082 | DFK-29 | FP-027 |
| | | | 114VE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 114VE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 114VE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 127VE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 127VE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 127VE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 145VE-T3A-T | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 145VE-T4A-T | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 145VE-T5A-T | 575/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | 4 | 172VE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 172VE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 172VE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 187VE-T3A-T | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 187VE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 187VE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |
| | | | 217VE-T4A-T | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 217VE-T5A-T | 575/3/60 | DFK-26 | FP-083 | DFK-35 | FP-026 |

Medium Temperature, 6 FPI, with Variable Speed EC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|-----|-------------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| ME - MEDIUM TEMPERATURE | 6 | 2 | 068ME-T3A-M | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 068ME-T4A-M | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 081ME-T3A-M | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 081ME-T4A-M | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 092ME-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 092ME-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 108ME-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 108ME-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | 3 | 123ME-T3A-M | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 123ME-T4A-M | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 135ME-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 135ME-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 162ME-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 162ME-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 181ME-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 181ME-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | 4 | 221ME-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 221ME-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 243ME-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 243ME-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | 271ME-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | |

Medium Temperature, 4 FPI, with Variable Speed EC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|-------------------------|----------|-----------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| PE - MEDIUM TEMPERATURE | 4 | 2 | 059PE-T3A-M | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 059PE-T4A-M | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 072PE-T3A-M | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 072PE-T4A-M | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 083PE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 083PE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 091PE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 091PE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | 3 | 109PE-T3A-M | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 109PE-T4A-M | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 122PE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 122PE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 137PE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 137PE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 150PE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 150PE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | 4 | 164PE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 164PE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 200PE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 200PE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 222PE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| 222PE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | | |
| 256PE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 | | | |

Low Temperature, 6 FPI, with Variable Speed EC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|----------------------|-----|-----------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| LE - LOW TEMPERATURE | 6 | 2 | 065LE-T3A-M | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 065LE-T4A-M | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 078LE-T3A-M | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 078LE-T4A-M | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 089LE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 089LE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | 3 | 094LE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 094LE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 118LE-T3A-M | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 118LE-T4A-M | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 134LE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 134LE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | 4 | 143LE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 143LE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 161LE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 161LE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 175LE-T3A-M | 208-230/3/60 | DFK-39 | FP-077 | SPECIAL | SPECIAL |
| | | | 175LE-T4A-M | 460/3/60 | DFK-26 | FP-081 | DFK-35 | FP-028 |
| | | 4 | 198LE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 198LE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 216LE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 216LE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 228LE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 228LE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |

Very Low Temperature, 4 FPI, with Variable Speed EC Motors

| TEMP | FPI | # of Fans | Model KHP | Voltage | 1 X EVAPORATOR | | 2 X EVAPORATOR | |
|---------------------------|-----|-----------|--------------|--------------|----------------|-----------------|----------------|-----------------|
| | | | | | Defrost Kit | Fuse Package | Defrost Kit | Fuse Package |
| VE - VERY LOW TEMPERATURE | 4 | 2 | 055VE-T3A-M | 208-230/3/60 | DFK-22 | FP-074 | DFK-33 | FP-025 |
| | | | 055VE-T4A-M | 460/3/60 | DFK-11 | FP-096 | DFK-20 | FP-032 |
| | | | 066VE-T3A-M | 208-230/3/60 | DFK-26 | FP-075 | DFK-35 | FP-034 |
| | | | 066VE-T4A-M | 460/3/60 | DFK-17 | FP-078 | DFK-29 | FP-031 |
| | | | 076VE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 076VE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | 3 | 087VE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 087VE-T4A-M | 460/3/60 | DFK-17 | FP-079 | DFK-29 | FP-030 |
| | | | 100VE-T3A-M | 208-230/3/60 | DFK-26 | FP-076 | DFK-37 | FP-033 |
| | | | 100VE-T4A-M | 460/3/60 | DFK-17 | FP-080 | DFK-29 | FP-029 |
| | | | 114VE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 114VE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | 4 | 127VE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 127VE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 145VE-T3A-M | 208-230/3/60 | DFK-31 | FP-043 | DFK-38 | FP-036 |
| | | | 145VE-T4A-M | 460/3/60 | DFK-22 | FP-050 | DFK-33 | FP-084 |
| | | | 172VE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 172VE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | 4 | 187VE-T3A-M | 208-230/3/60 | DFK-39 | FP-086 | SPECIAL | SPECIAL |
| | | | 187VE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 217VE-T3A-M | 208-230/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |
| | | | 217VE-T4A-M | 460/3/60 | DFK-26 | FP-046 | DFK-35 | FP-039 |

Defrost Kits

| Number of Evaps. | Kit Part Number | Description |
|------------------|-----------------|---|
| 1 | DFK-01 | Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (1P) |
| 1 | DFK-02 | Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (2P) |
| 1 | DFK-03 | Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (3P) |
| 1 | DFK-04 | Time Clock, HtrCont - 1x 40A (3P), FB 1x 60A (2P) |
| 2 | DFK-05 | Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (1P) |
| 2 | DFK-06 | Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (2P) |
| 2 | DFK-07 | Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (3P) |
| 2 | DFK-08 | Time Clock, HtrCont - 1x 50A (3P), FB 2x 60A (2P) |
| 2 | DFK-09 | Time Clock, HtrCont - 1x 50A (3P), FB 2x 30A (2P) |
| 1 | DFK-10 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P) |
| 1 | DFK-11 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P) |
| 2 | DFK-12 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P) |
| 2 | DFK-13 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P) |
| 1 | DFK-14 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 30A (3P) |
| 1 | DFK-15 | Time Clock, HtrCont - 1x40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P) |
| 1 | DFK-16 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (3P) |
| 1 | DFK-17 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P) |
| 2 | DFK-18 | Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P) |
| 2 | DFK-19 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P) |
| 2 | DFK-20 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P) |
| 1 | DFK-21 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P) |
| 1 | DFK-22 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P) |
| 2 | DFK-23 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P) |
| 2 | DFK-24 | Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P) |
| 1 | DFK-25 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 2x 60A (2P) |
| 1 | DFK-26 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P) |
| 2 | DFK-27 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P) |
| 2 | DFK-28 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (3P) |
| 2 | DFK-29 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P) |
| 2 | DFK-30 | Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 2x 60A (3P) |
| 1 | DFK-31 | Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P) |
| 2 | DFK-32 | Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P) |
| 2 | DFK-33 | Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P) |
| 2 | DFK-34 | Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 4x 60A (2P) |
| 2 | DFK-35 | Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 4x 60A (3P) |
| 2 | DFK-36 | Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 4x 60A (2P) |
| 2 | DFK-37 | Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P) |
| 2 | DFK-38 | Time Clock, HtrCont - 4x 50A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P) |
| 1 | DFK-39 | Time Clock, HtrCont1 - 1x 40A (3P), HtrCont2 - 2x 50A (3P), FanCont - 1x 40A (3P), FB 4x 60A (3P) |

NOTE: HtrCont = Heater Contactor, FanCont = Fan Contactor, FB = Fuse Block, (1P), (2P), (3P) = Number of Poles

(cont'd)

Fuse Packages

| Package Part Number | Description | Package Part Number | Description |
|---------------------|----------------------------|---------------------|-------------------------------------|
| FP-001 | FUSES (1) 15AMP | FP-054 | FUSES (3)15AMP (6) 35AMP |
| FP-002 | FUSES (1) 20AMP | FP-055 | FUSES (2) 15AMP (2) 45AMP |
| FP-003 | FUSES (1) 25AMP | FP-056 | FUSES (2) 15AMP (2) 40AMP |
| FP-004 | FUSES (2) 15AMP | FP-057 | FUSES (2) 20AMP (3) 50AMP |
| FP-006 | FUSES (2) 20AMP | FP-058 | FUSES (2) 15AMP (3) 45AMP |
| FP-007 | FUSES (2) 25AMP | FP-059 | FUSES (2) 15AMP (3) 30AMP |
| FP-008 | FUSES (4) 15AMP | FP-060 | FUSES (2) 15AMP (2) 35AMP |
| FP-010 | FUSES (4) 25AMP | FP-061 | FUSES (2) 15AMP (2) 50AMP |
| FP-012 | FUSES (2) 35AMP | FP-062 | FUSES (2) 15AMP (2) 60AMP |
| FP-013 | FUSES (3) 15AMP | FP-063 | FUSES (2) 15AMP (3) 25AMP |
| FP-014 | FUSES (3) 20AMP | FP-064 | FUSES (2) 15AMP (3) 35AMP |
| FP-015 | FUSES (4) 20AMP | FP-065 | FUSES (2) 15AMP (3) 40AMP |
| FP-016 | FUSES (4) 20AMP (6) 45AMP | FP-066 | FUSES (2) 15AMP (3) 20AMP |
| FP-017 | FUSES (4) 35AMP | FP-067 | FUSES (4) 15AMP (4) 35AMP |
| FP-018 | FUSES (6) 15AMP | FP-068 | FUSES (4) 15AMP (4) 50AMP |
| FP-019 | FUSES (6) 20AMP | FP-069 | FUSES (4) 15AMP (4) 60AMP |
| FP-020 | FUSES (2) 30AMP | FP-070 | FUSES (4) 15AMP (6) 25AMP |
| FP-021 | FUSES (4) 30AMP | FP-071 | FUSES (4) 15AMP (6) 35AMP |
| FP-022 | FUSES (8) 15AMP | FP-072 | FUSES (4) 15AMP (6) 40AMP |
| FP-023 | FUSES (2) 25AMP (3) 50AMP | FP-073 | FUSES (4) 15AMP (6) 20AMP |
| FP-024 | FUSES (2) 20AMP (3) 45AMP | FP-074 | FUSES (3) 20AMP (3) 60AMP |
| FP-025 | FUSES (6) 20AMP (6) 60AMP | FP-075 | FUSES (3) 20AMP (6) 35AMP |
| FP-026 | FUSES (6) 15AMP (12) 40AMP | FP-076 | FUSES (3) 25AMP (6) 50AMP |
| FP-027 | FUSES (6) 15AMP (6) 40AMP | FP-077 | FUSES (3) 35AMP (9) 45AMP |
| FP-028 | FUSES (6) 20AMP (12) 40AMP | FP-078 | FUSES (3) 15AMP (3) 35AMP |
| FP-029 | FUSES (6)15AMP (6) 50AMP | FP-079 | FUSES (3)15AMP (3) 45AMP |
| FP-030 | FUSES (6) 15AMP (6) 45AMP | FP-080 | FUSES (3) 15AMP (3) 50AMP |
| FP-031 | FUSES (6) 15AMP (6) 35AMP | FP-081 | FUSES (3) 20AMP (6) 40AMP |
| FP-032 | FUSES (6) 15AMP (6) 30AMP | FP-082 | FUSES (3) 15AMP (3) 40AMP |
| FP-033 | FUSES (6) 25AMP (12) 50AMP | FP-083 | FUSES (3) 15AMP (6) 40AMP |
| FP-034 | FUSES (6) 20AMP (12) 35AMP | FP-084 | FUSES (6) 15AMP (6) 60AMP |
| FP-035 | FUSES (4) 25AMP (6) 50AMP | FP-085 | FUSES (6) 15AMP (12) 35AMP |
| FP-036 | FUSES (6) 25AMP (12) 60AMP | FP-086 | FUSES (3) 35AMP (3) 45AMP (6) 60AMP |
| FP-037 | FUSES (6) 20AMP (12) 60AMP | FP-087 | FUSES (4) 20AMP (4) 40AMP (4) 50AMP |
| FP-038 | FUSES (6) 20AMP (12) 50AMP | FP-088 | FUSES (4) 15AMP (4) 35AMP (4) 40AMP |
| FP-039 | FUSES (6) 20AMP (12) 45AMP | FP-089 | FUSES (2) 20AMP (2) 40AMP (2) 50AMP |
| FP-040 | FUSES (6) 15AMP (12) 45AMP | FP-090 | FUSES (2) 15AMP (2) 35AMP (2) 40AMP |
| FP-041 | FUSES (5) 15AMP | FP-091 | FUSES (2) 20AMP (2) 35AMP (2) 40AMP |
| FP-042 | FUSES (10) 15AMP | FP-092 | FUSES (2) 25AMP (2) 40AMP (2) 50AMP |
| FP-043 | FUSES (3) 25AMP (6) 60AMP | FP-093 | FUSES (4) 20AMP (4) 35AMP (4) 40AMP |
| FP-044 | FUSES (3) 20AMP (6) 60AMP | FP-094 | FUSES (6) 15AMP (6) 25AMP |
| FP-045 | FUSES (3) 20AMP (6) 50AMP | FP-095 | FUSES (3) 15AMP (3) 25AMP |
| FP-046 | FUSES (3) 25AMP (6) 45AMP | FP-096 | FUSES (3) 15AMP (3) 30AMP |
| FP-047 | FUSES (3) 15AMP (6) 45AMP | FP-097 | FUSES (4) 15AMP (4) 30AMP |
| FP-048 | FUSES (4) 15AMP (4) 45AMP | FP-098 | FUSES (4) 15AMP (4) 25AMP |
| FP-049 | FUSES (4) 15AMP (4) 40AMP | FP-099 | FUSES (4) 15AMP (4) 20AMP |
| FP-050 | FUSES (3) 15AMP (3) 60AMP | FP-100 | FUSES (2) 15AMP (2) 20AMP |
| FP-051 | FUSES (4) 20AMP (6) 50AMP | FP-101 | FUSES (2) 15AMP (2) 25AMP |
| FP-052 | FUSES (4) 15AMP (6) 45AMP | FP-102 | FUSES (2) 15AMP (2) 30AMP |
| FP-053 | FUSES (4) 15AMP (6) 30AMP | FP-103 | FUSES (4) 25AMP (4) 40AMP (4) 50AMP |

NOTE: FUSES 30AMP and Below - Class CC Type, FUSES 35AMP and Above - Class J Type



PRODUCT SUPPORT

*web: www.k-rp.com/khp
email: evaps@k-rp.com
call: 1-844-893-3222 x520*



TROUBLESHOOTING

*email: troubleshooting@k-rp.com
call: 1-844-893-3222 x529*




SERVICE PARTS

*web: www.k-rp.com/parts
email: parts@k-rp.com
call: 1-844-893-3222 x520*



WARRANTY

*web: www.k-rp.com/warranty
email: warranty@k-rp.com
call: 1-844-893-3222 x501*



ORDERS

*email: orders@k-rp.com
call: 1-844-893-3222 x501*



SHIPPING

*email: shipping@k-rp.com
call: 1-844-893-3222 x503*



KeepRite Refrigeration
Brantford, ON • Longview, TX
1-800-463-9517 info@k-rp.com www.k-rp.com

